
rigas ONE Calibration Gases



- Compact(1L size)
- High pressure
- Non-reactive gas
- Reactive gas
- PAMS
- TO-14A

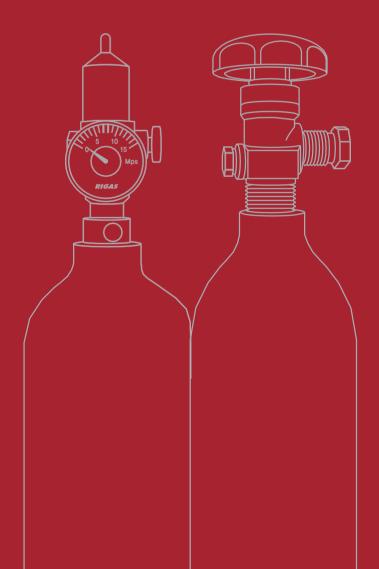

Company Information

A Company specialized in Production, Analysis and Research of Standard Materials

RIGAS Co., Ltd manufactures all standard gases in gravimetric method using high precision and high capacity scale. We guarantee the accuracy for the concentration of every component by quantifying and verifying with various gas analyzers.

A company manufacturing variety of Standard Materials

RIGAS Co., Ltd provides standard gases in various specifications that customers need.

Approvals

- Appointed as a government-authorized standard gas testing and certification agency by Korea National Institute of Environmental Research
- KS Q ISO 9001 certification
- KS A ISO 17034



rigas ONE

rigas ONE developed by RIGAS Co., Ltd is a compact high pressure standard gas. It is made to be easy to use anywhere at anytime. RIGAS provides customers with the various components and concentrations needed for the calibration and so on.

Special features

- The quality and safety of cylinders and valves are guaranteed as certified products of DOT and KGS(Korea Gas Safety Corporation).
- All products are provided to customers with certificate of analysis.
- All products are traceable through international standard institution.
- We will supply customers with the pressure you want and it can be refilled up to 10 MPa.

Traceability

Our analytical operations are traceable through a calibration standard produced to either a recognized international standard such as KRISS, NIST, VSL, NPL, or a gravimetrically manufactured reference standard traceable to KRISS 1. WT CLASS standard masses.



rigas ONE

RIGAS CO. LTD.'s small 1L standard gas tanks are refillable high-pressure cylinders available in two models, R1 and R2. Each standard cylinder offers high stability, confirmed according to composition and concentration standards. The detailed characteristics of R1 and R2 cylinders are as follows:

R1 The cylinders offer improved compatibility and convenience with regular small valves and are suitable for non-reactive components and exhaust gas of automobile.

Components of R1 Non-reactive component, O2, CO, CO2, N2, exhaust gas of automobile, etc. Cylinder 1.0 L (D 8.1cm, H 33cm) 0.98 kg Size Weight * Size including the valve * Weight including the valve Material 7.0 MPa or less Aluminum Pressure Valve Body Ni plated Brass Connection 5/8-18 UNF thread

R2 With enhanced stability for product concentration and special chemical treatment, they are suitable for reactive or adsorptive components.

Components	s of R2			
Reactive con				
Cylinder	-LUILE OFFICE			
Size	1.1 L (D 8.1cm, H 38cm) * Size including the valve	Weight	1.4 kg * Weight including the valve	一
Material	Aluminum	Pressure	10 MPa or less	1927 81 TS2206888
Valve				
Body	SUS	Connection	CGA-180	

Product Information

Standard gas available

- Atmospheric Environmental Calibration Standards
- Petrochemical and Natural Gas Standards
- Odor Standards
- Toxic Gas Mixtures
- PAMS (Ozone Precursor)

- Automobile Exhaust Gas Standards
- Laser Gas Mixtures
- Volatile Organic Compound Standards (VOCs)
- Other Gas Mixtures
- TO-14A (Toxic Organics)

Pure gas - Provides R1, R2

Components	Concentration (cmol/mol)
N ₂	99.999 / 99.999 9
Air	Air / zero-Air / UHP-Air

Non-reactive gas - Provides R1, R2

Components	Concentration (cmol/mol)	Balance	Urel.*
H ₂	2.00	Air	2
O ₂	2.00 ~ 20.9	N ₂	2
iso-C₄H ₈	0.01	Air	2
CO ₂	0.03 ~ 20	N ₂ / Air	2

 If you have any inquiry on products and mixing besides the above components and concentration, ask for consultation and we will provide further information.

E-mail : master@rigas.co.kr (Domestic-Korea), sales@rigas.co.kr (Overseas)

- * Urel : relative expanded uncertainty
- * Each standard cylinder offers high stability, confirmed according to composition and concentration standards.

Product Information

Components	Concentration (cmol/mol)	Balance	Urel.*
NO	0.001	N ₂	3
SO ₂	0.001	N ₂	3
СО	0.001	N ₂	3
H₂S	0.002 ~ 0.005	N ₂ / Air	< 3
NH₃	0.002 ~ 0.010	N ₂	< 3
HCI	0.001	N ₂	3
HCN	0.001	N ₂	5
Cl ₂	0.000 5 ~ 0.001	N ₂	5
C₂H₅OH	0.1 ~ 0.2	Air	2
PH₃	0.000 06	N ₂	10
NO ₂	0.005	N ₂	2
SiH₄	0.001	N ₂	5
C₂H₄O	0.030	N ₂	3

Reactive gas (single component) - Provides R2

If you have any inquiry on products and mixing besides the above components and concentration, ask for consultation and we will provide further information.
E-mail : master@rigas.co.kr (Domestic-Korea), sales@rigas.co.kr (Overseas)

* Urel : relative expanded uncertainty

* Each standard cylinder offers high stability, confirmed according to composition and concentration standards.

Product Information

Reactive gas (multi components) - Provides R2

Components	Concentration (cmol/mol)	Balance	Urel.*
H₂S	0.001~0.005	N2	< 5
CO	0.005~0.05		2
CH₄	1.5~2.5		2
O₂	15~19		2
CH₃SH	0.001	N ₂	5
H₂S	0.001		5
DMS	0.001	N ₂	5
DMDS	0.001		5

Automobile Exhaust Gas - Provides R1, R2

Components	Concentration (cmol/mol)	Balance	Urel.*
CH₄	2.5	N₂ / Air	2
iso-C₄H10	0.9	N₂ / Air	2
CO2 C3H8 CO O2	14 0.2 1 1	N₂	2

If you have any inquiry on products and mixing besides the above components and concentration, ask for consultation and we will provide further information.

E-mail : master@rigas.co.kr (Domestic-Korea), sales@rigas.co.kr (Overseas)

* Urel : relative expanded uncertainty

* Each standard cylinder offers high stability, confirmed according to composition and concentration standards.

PAMS, TO-14A

PAMS 57 Components mix (Ozone Precursor) - Provides R2

VOCs measured by the Photochemical Assessment and Measurement Station (PAMS) as precursors contributing to ozone generation

TO-14A 43 Components mix (Toxic Organics) - Provides R2

VOCs according to the US Environmental Protection Agency (EPA) standards as hazardous air pollutants in the atmosphere

Special features


- Highly convenient and portable small 1L container (R2)
- · Highly reliable values proven through short-term/long-term stability assessment
- KS I ISO 6142: Manufactured in accordance with 2015 standards (Gas analysis-Production of calibration gas mixture-Gravimetric method)
- · Cylinders with special internal treatment
- Validity period of 12 months
- Precise measurement of components with low-vapor pressure and additional cylinder heating/regulator heating devices

Product information

	Concentration	Balance	Specification
	5 nmol/mol	N ₂	Blend tolerance: ±30 % ; Analytical accuracy: ±20 %
PAMS 1 µmol/mol	1 µmol/mol	N ₂	Blend tolerance: ±10 % ; Analytical accuracy: ±5 %
	10 nmol/mol	N ₂	Blend tolerance: ±20 % ; Analytical accuracy: ±10 %
TO-14A 1 µmol/mol N		N ₂	Blend tolerance: ±10 % ; Analytical accuracy: ±5 %

Analytical Tips

- Some of the components with the low-vapor pressure in PAMS and TO-14A are gradually condensed in cylinders depending on time elapsed, storage temperature, and usage environment after manufacturing. As a result of it, lower concentration may be detected. Cylinder heating systems provided by RIGAS will help you to use those components at the correct concentration.
- Components with low-vapor pressure or strong adsorption may be adsorbed during the analysis process. It will cause difficulty to detect accurate concentration. With regulator heating systems provided by RIGAS, the concentration stabilization time of the components can be shorten and ensure accurate figures.
- Comparison of the peak size of n-Dodecane 1 μmol/mol in PAMS by time (3 months after manufacturing)

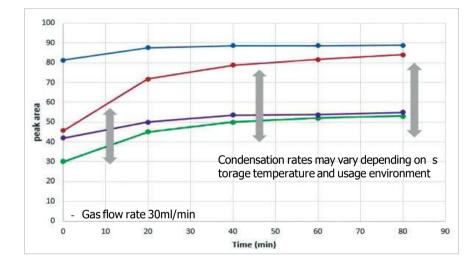



[Cylinder Heating Device]

	Cylinder Heating Device	Regulator Heating Device	Result
—	Y	Y	Normal level
—	Y	Ν	90 % of normal level
_	Ν	Y	50 % less than normal
_	Ν	Ν	50 % less than normal




[Regulator Heating Device]

Research Institute of Gas Analytical Science aas ON

RIGAS supplies cylinder heating and regulator heating devices for precise component concentration analysis.


PAMS 57 Components mix (Ozone Precursor)

Chromatogram & components

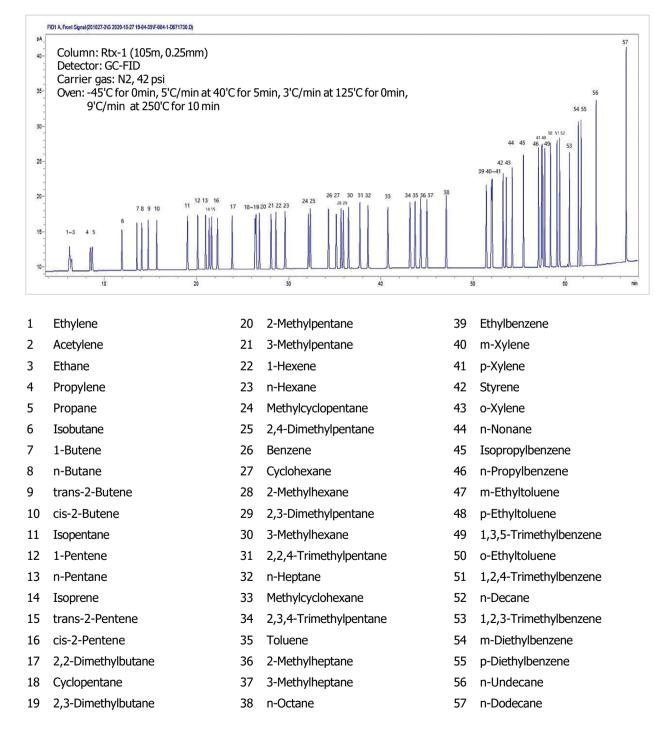

TO-14A 43 Components mix (Toxic Organics)

Chromatogram & components

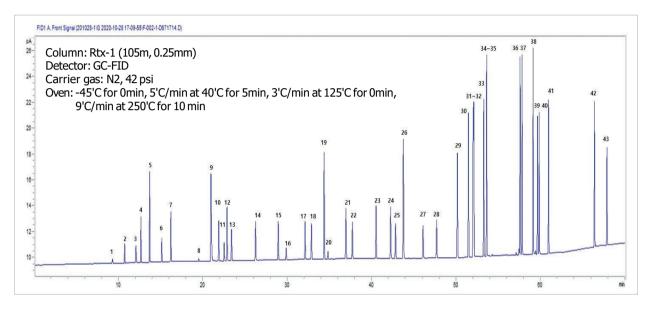

- 1 Dichlorodifluoromethane
- 2 Chloromethane
- 3 Freon-114
- 4 Vinyl Chloride
- 5 1,3-Butadiene
- 6 Bromomethane
- 7 Chloroethane
- 8 Freon-11
- 9 Acr ylonitrile
- 10 1,1-Dichloroethene
- 11 Methylene Chloride
- 12 3-Chloropropene
- 13 Freon-113
- 14 1,1-Dichloroethane
- 15 cis-1,2-Dichloroethylene
- 16 Chloroform
- 17 1,2-Dichloroethane
- 18 1,1,1-Trichloroethane
- 19 Benzene

- 20 Carbon Tetrachloride
- 21 1,2-Dichloropropane
- 22 Trichloroethylene
- 23 cis-1,3-Dichloropropene
- 24 trans-1,3-Dichloropropene
- 25 1,1,2-Trichloroethane
- 26 Toluene
- 27 1,2-Dibromoethane
- 28 Tetrachloroethylene
- 29 Chlorobenzene
- 30 Ethylbenzene
- 31 p-Xylene
- 32 m-Xylene
- 33 Styrene
- 34 o-Xylene
- 35 1,1,2,2-Tetrachloroethane
- 36 4-Ethyltoluene
- 37 1,3,5-Trimethylbenzene
- 38 1,2,4-Trimethylbenzene

- 39 1,3-Dichlorobenzene
- 40 1,4-Dichlorobenzene
- 41 1,2-Dichlorobenzene
- 42 1,2,4-Trichlorobenzene
- 43 Hexachloro-1,3-Butadiene



(주)리가스 www.rigas.co.kr E-mail. master@rigas.co.kr Tel. 042-934-6900(0) Fax. 042-935-8814 Address. 대전광역시 대덕구 대덕대로1284번길 17(신일동) 우편번호 34323

RIGAS Co., Ltd. www.rigas.co.kr/eng

E-mail. sales@rigas.co.kr Tel. +82-70-5031-6941 Fax. +82-42-935-8814 Address. 17, Daedeokdae-ro 1284beon-gil, Daedeok-gu, Daejeon, Korea(South), 34323

韩气科研www.rigas.co.kr/ch/ E-mail. sales@rigas.co.kr Tel. +82-70-5031-6941 Fax. +82-42-935-8814 Address. 大韩民国大田广域市大德区大德大路 1284番街 17 (新一洞) 邮编 34323

